

ÁNODOS DE ZINC ZINC ANODES ANODI IN ZINCO


REF	R.O. OEM	ROSCA TAPÓN PLUG THREAD PASSO TAPPO	Ø mm	LONGITUD LENGTH LUNGHEZZA	ROSCA THREAD PASSO
TEN02090		Sólo ánodo Only anode Solo anodo	15	22	12
TEN02090T		18 x 15	15	22	12



Ref.	R.O. OEM
TEN01804	




ZN	(KG / LB)	Ø EJE Ø SHAFT Ø ASSE	h (mm)	m (mm)	Ø (mm)
TEN01801	0,075 kg / 0.17 lb	22 - 25	36	16 x 2	27
TEN01802	0,145 kg / 0.32 lb	28 - 34	47	20 x 2,5	35
TEN01803	0,28 kg / 0.62 lb	40	48	28 x 2,5	41
TEN00490	0,31 kg / 0.68 lb	40	50	M20	40
TEN00491	0,3 kg / 0.66 lb	40	50	M24	40
TEN00492	0,295 kg / 0.65 lb	40	50	M27	40
TEN00493	0,265 kg / 0.58 lb	40	50	M30	40
TEN00494	0,31 kg / 0.68 lb	40	52	20 x 2	40
TEN00495	0,28 kg / 0.62 lb	40	50	26 x 2	40

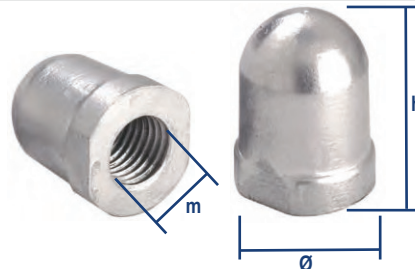

SOLE DIESEL


ÁNODOS DE ZINC ZINC ANODES ANODI IN ZINCO

REF	R.O. OEM	kg / lbs	Ø EJE SHAFT Ø Ø ASSE mm	H mm	Ø mm	Ø1 mm
TEN00400SOLE/1	40030092	0,120 / 0.26	30	39	24	32
TEN00400SOLE/2	50035092	0,20 / 0.44	35	46	26	37
TEN00400SOLE/3	40045092	0,40 / 0.88	45	60	36	47
TEN00400SOLE/4	40050092	0,56 / 1.23	50	70	45	55



IMPULSORES IMPELLER GIRANTE

R.O. OEM	PALAS BLADES PALE	JOHNSON	CEF	RECMAR	MEDIDAS (mm) MEASURES (mm) MISURE (mm)			
					A	B	C	
347.11.008	8	SM-75 (72 HP) SM-90 (88 HP) HS-121 (115 HP) HS-270 (270 HP) 150 (165 HP)	JOH09-1028B	CEF500106GT	REC3841697	14,29	65	50,2
351.11.008	12	MINI - 50	JOH09-1027B	CEF500107T	REC21213660	14,29	57	31,6
312.11.008	6	MINI - 11 / 17 / 23 MINI - 26 / 34 / 48		CEF500123X		12	52	25
321.11.008	6	MINI-11 (11 HP) MINI-17 (16 HP) MINI-26 (25 HP) MINI-34 (31 HP) MINI-48 (45 HP)		CEF500131X		10	39,6	19,2



REC21213660



CEF500123X



CEF500131X